

HEAT PUMP
DEDICATED TO SMALL POOLS

POOLEX
HEAT PUMP FOR SWIMMING POOL

POOLEX
NANO
TURBO




COP \geq 5.3
AIR 26°C WATER 26°C

< 29dB **
AT 10 M

FOR POOL UNTIL
25 m³

**ULTRA
COMPACT**

-5°C



Heating range

40°C

* COP above 5,3 based on Air 26°C, water 26°C, hygro 80% and certified by TÜV
** Average noise 10m distance from heat pump

HEAT PUMP

DEDICATED TO SMALL POOLS

POOLEX
NANO
TURBO

Works
from
-5°C



COP ≥ 5.3
AIR 26°C WATER 26°C

< 29dB**
AT 10 M

UNTIL
25 m³

**ULTRA
COMPACT**

Pooler NANO TURBO :

The heat pump developed especially for pools of less than 25m³.

With its TOSHIBA compressor, the Nano Turbo ensures a suitable temperature in pool throughout the summer.

Plug it into a conventional electrical outlet, and heat your pool above ground in a few hours.

Its unique design allows to integrate it new to any pool of spa.



Certification



MATERIAL DURABLE



SILENT EFFICIENCY



WARRANTIES


HEAT PUMP GUARANTEED FOR 2 YEARS

COMPRESSOR GUARANTEED FOR 5 YEARS

ITANIUM HEATING COIL GUARANTEED 15 YEARS AGAINST CORROSION

AVANTAGES

- ULTRA COMPACT DESIGN
- COMPATIBLE WITH ALL ABOVE GROUND SWIMMING POOL
- TRANSPORTABLE (17KG)
- ULTRA SILENT
- ECONOMIC
- SECURISED ELECTRICAL SYSTEM
- OPERATING FROM -5°C

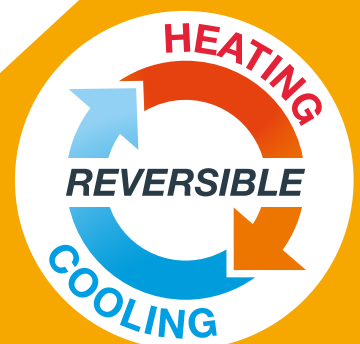

* COP above 5,3 based on Air 26°C, water 26°C, hygro 80% and certified by TÜV
** Average noise 10m distance from heat pump



TECHNICAL DATA

Swimming pool volume (m ³)	≤ 25	
Ref : PC-NANOPACACTION		
Air 26°C Water 26°C Hygro 80%	Capacity (W)	2950
	Puissance consumption (W)	560
	COP	5,3
Air 15°C Water 26°C Hygro 70%	Capacity (W)	2240
	Puissance consumption (W)	520
	COP	4,31
Electricity supply	Mono 220-240V / 50Hz	
Max power (W)	600	
Max current (A)	2,59	
Heating temperature range	15°C / 40°C	
Operating range	10°C / 43°C	
Flow (m ³ /h)	1,2	
Refrigerant	R32	
Packaging dimensions (mm)	400 x 280 x 365	
Dimensions (mm)	460 x 370 x 415	
Net/gross weight (kg)	18 / 20	
Noise at 1 metre (dB(A))	<46	
Noise at 4 metres (dB(A))	<36	
Noise at 10 metres (dB(A))	<29	
Compressor type	Rotary	
Exchanger	Twisted Tech® Titane	
Function	Heating	
Load losses (mCE)	0,8	

Standard E.U.
TUV Certified

ACCESSORIES INCLUDED



Maintenance kit



PVC connectors
Ø 32-38mm




Electrical socket with 10 mA
differential protection

COMPATIBLE WITH



Spas of less than
25m³

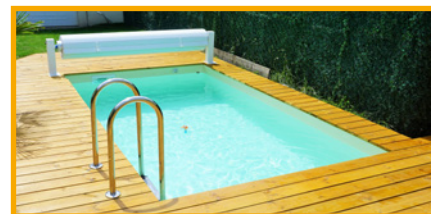

Small pools of
less than 25m³



Above ground
pools

POOLEX NANO ACTION

POOLEX
HEAT PUMP FOR SWIMMING POOL



Commercial service

Tel : 04 91 51 15 16

Mail : contact@poolstar.fr

WWW.POOLEX.FR

POOLEX
HEAT PUMP FOR SWIMMING POOL

is a trademark of

Poolstar Group.
Your Swimming Pool & Wellness Partner